# **LEMCO)**L

## waste bin



### Load Capacities up to 550kg

- Cold formed and fabricated frames provide durability and strength
- Swivel castors have a double ballrace to reduce wear
- Frames are black zinc plated to provide a corrosion resistant finish
- Grease nipples are fitted in the ballrace and wheel
- Plain bore ductile S.G iron wheels available for high impact loading
- Polyurethane and rubber wheels are available where surface condition or noise is a factor.
- 12mm high tensile bolts and nyloc nuts used as standard.
- Total lock (suffix L) available on polyurethane and rubber wheels
- Directional Lock (suffix K) available on all swivel castors
- Manufactured in Australia
- 12 month warranty

# The Lemcol waste bin range has been designed for extreme strength and durability.

#### **Frames**

The range is made through the cold forming and fabrication of 8mm thick material. The swivel races are sealed against dust and supported by a grease nipple to maximise the working life when maintained correctly. All frames have a black zinc plated finish to provide corrosion resistance under normal conditions. Axle bolt options include either a M12 high tensile or 5/8" BSW bolt.

The plate size is based upon industry standard dimensions, conforming to AS B282.

#### Wheels

A ductile S.G iron wheel with a plain bearing is provided as an industry standard. This material is less brittle than standard cast iron, resisting cracking and breaking under high impact. Where surface condition or noise is a consideration, polyurethane on cast iron and black rubber on cast iron wheel options are also available.

### Optional Hardware: Quick Release Castor Pad

The introduction of a quick release castor pad provides a simple solution to the problem of castor changeover. The pad is welded onto the waste bin and the castor is held into the pad with the use of two bolts. The user can easily remove the castor by removing one bolt only. This allows the changeover to occur on-site rather than the inconvenience of returning the bin to the depot.

#### Quick Release Foot Pad

The castor foot pad is used to compliment the castor pad when there is no requirement to have the waste bin mobile. The use of the foot pad reduces the possibility of damage to the castor pad and bottom of the waste bin.

### 12 Month Warranty

All products in this range carry our standard 12 month warranty against faulty workmanship and materials, and is backed by a service and parts network Australia wide.





# waste bin

WHEEL SPECIFICATIONS						CASTOR SPECIFICATIONS						
Dia 'A'	Width 'B'	Wheel Type	Wheel Model No.	Bearing	Capacity	Height 'C'	Swivel Model No.	Rigid Model No.		pt Radius Sw.+Brake	Produc Swivel	t Code Rigid
150	50	Polyurethane	L86410	Roller	470	196	L76411WB	L76412WB	127	155	03274139	03274156
150	50	Polyurethane	L86410	Roller	470	196	L76411-58WB	L76412-58WB	127	155	03274207	03274224
150	50	Black Rubber	L86210	Roller	200	196	L76211WB	L76212WB	127	155	03328250	03328284
150	50	Black Rubber	L86210	Roller	200	196	L76211-58WB	L76212-58WB	127	155	03328267	03328301
150	50	S.G Iron	L617GN	Plain	550	196	L76501	L76502	127	N/A	03274088	03274122
150	50	S.G Iron	L617GN	Plain	550	196	L76501-58	L76502-58	127	N/A	03274173	03274190

Options:
Total Lock Brake, use suffix L after the swivel model number - i.e. L76411WBL (for polyurethane and rubber wheel selection only)
Directional Lock (over the wheel), use suffix K after the swivel model number - i.e. L76211WBK


Quick Release Castor Pad Product Number L7QRCP




Quick Release Foot Pad Product Number L7QRFP



### TECHNICAL SPECIFICATIONS

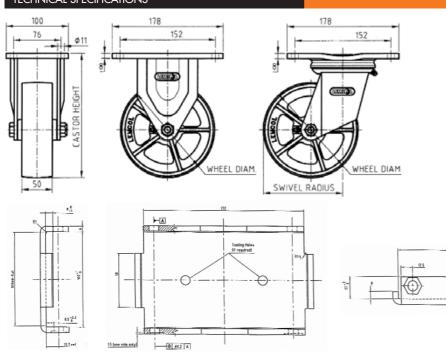





Models and specifications are subject to change
without notice, all dimensions are nominal

**Adelaide** Tel: 08 8229 7800 Fax: 08 8445 1802 **Brisbane** Tel: 07 3217 0699 Fax: 07 3217 0822 **Sydney** Tel: 02 9648 3866 Fax: 02 9648 3599 **Perth** Tel: 08 9277 6999 Fax: 08 9331 1563 **Melbourne** Tel: 03 9548 9435 Fax: 03 9548 9460

